GLOBALTINT SI

Industrial colorants, based on a resin compatible with a wide range of solvent systems:

- **Alkyd, long,medium and short oils; Poliurethane; acrylic; rubber and thermoplastic; epoxy, etc**
- **Suitable for volumetric tinting machines and "in plant" gravimetric systems**
- **Database with all international colorcards**

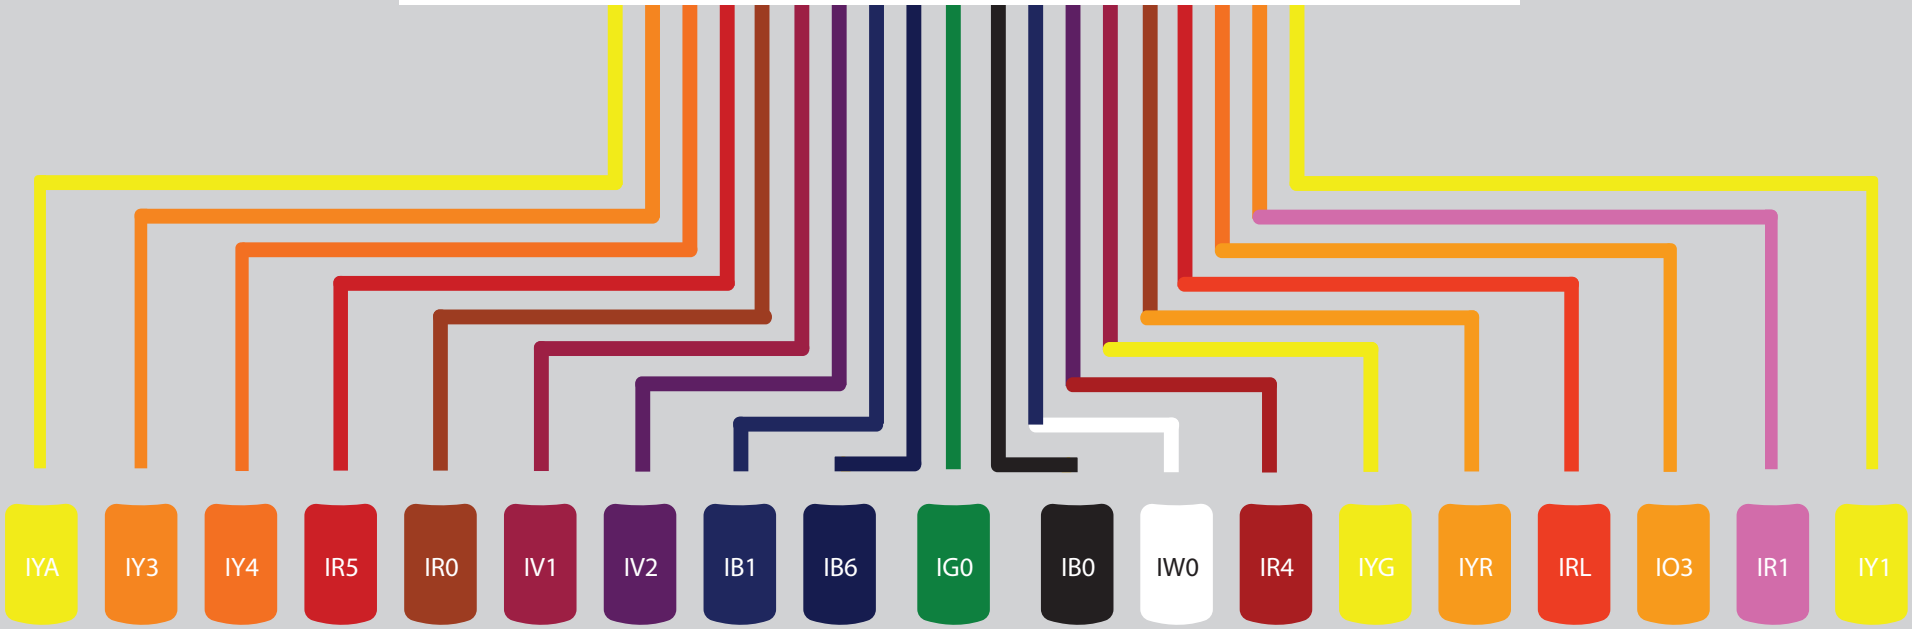

www.glc-quimica.com tel/fax +351 220 997 459 Rua da Boavista, 108 Armazém 8 4415-452 Grijó - Vila Nova de Gaia

GLOBALTINT SI

	Systems				References GLOBALTINT	Colour Index	Density	Pig. Conc %	Weathering Fastness		Light Fastness		Temperature resistance ºC
	10	12	13	16					S-MT	1/25 SD	S-MT	1/25 SD	
Colorants without lead		X	X	X	SI YBOA (IYA)	PY138	1.24	13.5	4-5	4-5	8	8	200
		X	X	X	SI Y39 (IY3)	PY139	1.24	36.7	4-5	4-5	8	8	200
	X	X	X	X	SI Y42 (IY4)	PY42	1.61	55	4-5	4-5	7-8	7-8	200
	X	X	X	X	SI R54 (IR5)	PR254	1.12	23.8	5	5	8	8	200
	X	X	X	X	SI R01 (IR0)	PR101	1.86	8	4-5	4-5	7-8	7-8	150
		X	X	X	SI V19 (IV1)	PV19	1.26	12	4	4	7-8	7-8	200
		X	X	X	SI V23 (IV2)	PV23	1.07	12	5	4	8	7-8	160
	X	X	X	X	SI B15 (IB1)	PB15.3	1.10	27	5	5	8	8	200
		X	X	X	SI B16 (IB6)	PB15.6	1.14	29	5	5	8	8	200
	X	X	X	X	SI G07 (IG0)	PG7	1.14	26	5	5	8	8	200
	X	X	X	X	SI B07 (IB0)	PB7	1.28	20	4-5	4-5	7-8	7-8	200
	X	X	X	X	SI W06 (IW0)	PW6	1.98	65	4-5	4-5	7-8	7-8	200
Can´t be use in epoxy systems			X	X	SI R48 (IR4)	PR48.4	1.15	33	5	4-5	7-8	7-8	150
Colorants lead containing				X	SI YGLC (IYG)	PY34	2.04	65	4	3-4	6-7	5-6	150
				X	SI YRLC (IYR)	PY34	2.00	60	4	3-4	6-7	5-6	150
				X	SI ROLC (IRL)	PR104	1.98	55	4	3-4	6-7	5-6	150
	X				SI O36 (IO3)	PO36	1.15	30	4-5	4	7	7	200
	X				SI R122 (IR1)	PR122	1.04	15	4-5	3-4	7-8	6-7	200
	X				SI Y184M (IY1)	PY184/PY155	1.61	50	5	4-5	8	7-8	200

www.glc-quimica.com tel/fax +351 220 997 459 Rua da Boavista, 108 Armazém 8 4415-549 Grijó - Vila Nova de Gaia